


NA20

懸臂梁稱重傳感器 SHEAR BEAM LOAD CELL

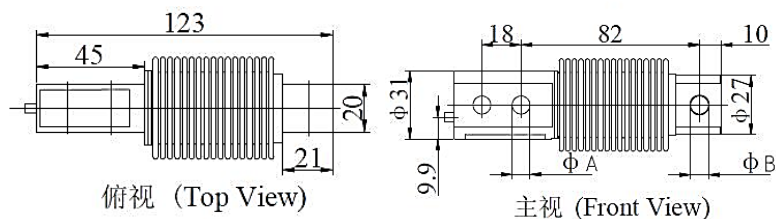

Capacity	Φ A	Φ B
5~200kg	Φ 8.2	Φ 8.2
500kg	Φ 10.5	Φ 11.1

Rated Capacities	5, 10, 20, 50, 100, 200, 500 (kg)
Rated Output	2.0 mV/V±0.25%
Zero Balance	±0.0200 mV/V
Non-linearity	0.02 %R.O.
Hysteresis	0.02 %R.O.
Repeatability	0.02 %R.O.
30mins Creep	0.02 %R.O.
30mins Return	0.02 %R.O.
Safe Overload	150 %R.O.
Ultimate Overload	200 %R.O.
Temperature Effect On Output	0.002 %R.O./°C
Temperature Effect On Zero	0.003 %R.O./°C
Input Impedance	385±15 Ω
Output Impedance	350±5 Ω
Insulation Impedance	≥5000 MΩ/(50VDC)
Recommended Excitation	5~12 VDC
Maximum Excitation	15 VDC
Operating Temperature Range	-20~60 °C
Construction	Steel Alloy; Stainless Steel
Protection Class	IP66 / IP68
Cable	φ5×3m
Recommended Platform Size	
Mode of Connection	Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)