


NS2

S型稱重傳感器 S TYPE LOAD CELL

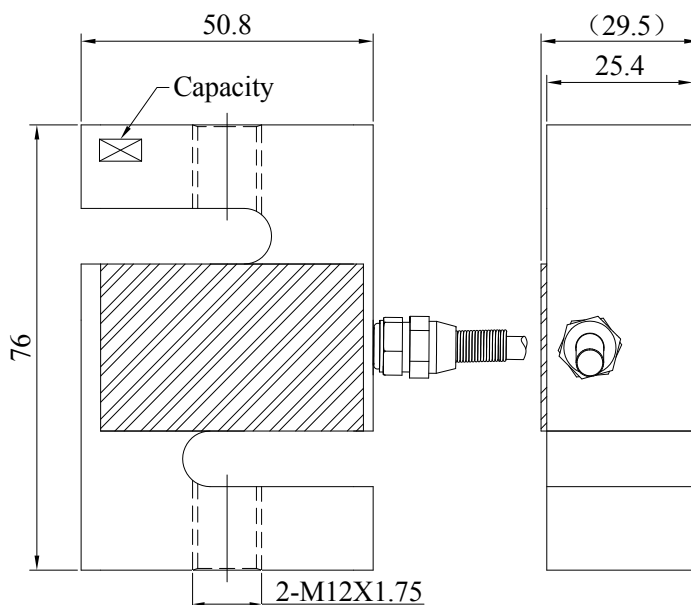

用途特点：料斗秤、吊鉤秤

Usage & Features: Hopper Scale、Crane Scale

主视 (Front View)

右视 (Right View)

技術參數 Specification

額定負荷Rated Capacities	1, 1.5, 2 (t)
額定輸出Rated Output	2.0 mV/V $\pm$ 0.25%; 3.0 mV/V $\pm$ 0.25%
零點平衡Zero Balance	$\pm$ 0.0200 mV/V
非線性Non-linearity	0.03 %R.O.
滯後Hysteresis	0.03 %R.O.
重復性Repeatability	0.03 %R.O.
蠕變(30分鐘)30mins Creep	0.03 %R.O.
回零(30分鐘)30mins Return	0.03 %R.O.
安全過載率Safe Overload	150 %R.O.
極限過載率Ultimate Overload	200 %R.O.
輸出溫度影響Temperature Effect On Output	0.002 %R.O./ $^{\circ}$ C
零點溫度影響Temperature Effect On Zero	0.003 %R.O./ $^{\circ}$ C
輸入阻抗Input Impedance	390 $\pm$ 15 Ω
輸出阻抗Output Impedance	350 $\pm$ 5 Ω
絕緣阻抗Insulation Impedance	$\geq$ 5000 M Ω /(50VDC)
推薦工作電壓Recommended Excitation	5~12 VDC
最大工作電壓Maximum Excitation	15 VDC
工作溫度範圍Operating Temperature Range	-20~60 $^{\circ}$ C
材質Construction	合金鋼Steel Alloy
防護等級Protection Class	IP67 / IP68
電纜Cable	ϕ 5 $\times$ 3 m
接線方式Mode of Connection	紅：電源+，黑：電源-，綠：信號+，白：信號- Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)

地址：廈門市海滄區新陽工業區新樂路19號 (Address:NO.19 XINLE ROAD XINYANG INDUSTRIAL ZONE HAICANG XIAMEN CHINA)

TEL:+86-592-5629881/882 FAX:+86-592-5629883 <http://www.mavin.cn> E-mail:mavin@mavin.cn