



NA3

單點式稱重傳感器 SINGLE POINT LOAD CELL

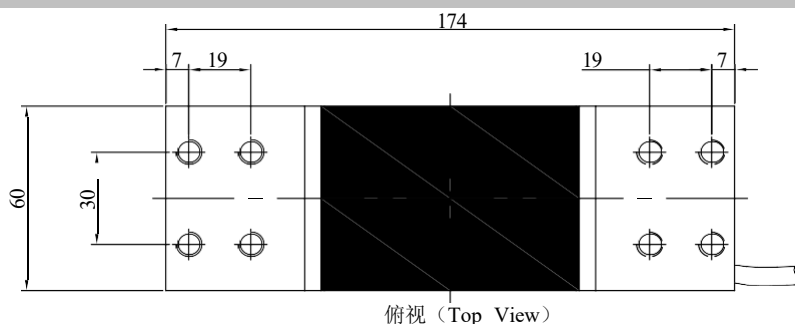

俯視 (Top View)

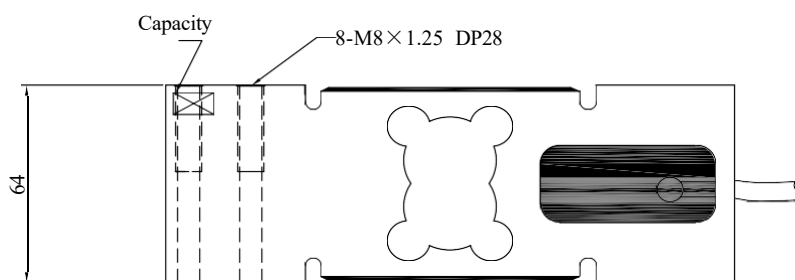

主視 (Front View)

用途特點：計價秤、計數秤

Usage & Features: Pricing Scale、Counting Scale

技術參數 Specification

額定負荷Rated Capacities	60~1200(kg)	60~1200(kg)
額定輸出Rated Output	2.0 mV/V±5%	2.0 mV/V±5%
零點平衡Zero Balance	±0.0200 mV/V	±0.0200 mV/V
精度等級Accuracy class		OIML C3
最大檢定分度數Maximum number of load cell interval(nmax)		3000
最小檢定分度值Minimum number of load cell interval(V min)		Emax/7000
非線性Non-linearity	0.02 %R.O.	0.017 %R.O.
滯後Hysteresis	0.02 %R.O.	0.017 %R.O.
重複性Repeatability	0.02 %R.O.	0.017 %R.O.
蠕變(30分鐘)30mins Creep	0.02 %R.O.	0.017 %R.O.
回零(30分鐘)30mins Return	0.02 %R.O.	0.017 %R.O.
安全過載率Safe Overload	150 %R.O.	150 %R.O.
極限過載率Ultimate Overload	200 %R.O.	200 %R.O.
輸出溫度影響Temperature Effect On Output	0.002 %R.O./°C	0.0015 %R.O./°C
零點溫度影響Temperature Effect On Zero	0.003 %R.O./°C	0.002 %R.O./°C
輸入阻抗Input Impedance	410±15 Ω; 390±15 Ω	410±15 Ω
輸出阻抗Output Impedance	350±5 Ω	350±5 Ω
絕緣阻抗Insulation Impedance	≥5000 MΩ/(50VDC)	≥5000 MΩ/(50VDC)
推薦工作電壓Recommended Excitation	5~12 VDC	5~12 VDC
最大工作電壓Maximum Excitation	15 VDC	15 VDC
工作溫度範圍Operating Temperature Range	-20~60 °C	-20~60 °C
材質Construction	鋁合金Aluminum Alloy; 合金鋼Steel Alloy	鋁合金 Aluminum Alloy
防護等級Protection Class	IP66 / IP67	IP66 / IP67
電纜Cable	φ5×2m	φ5×2m
推薦台面尺寸Recommended Platform Size	600×600 mm; 600×800 mm	600×600 mm; 600×800 mm
接線方式Mode of Connection	紅：電源+，黑：電源-，綠：信號+，白：信號-Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)	