




足立特殊測器(廈門)有限公司NTS INSTRUMENT(XIAMEN) CO.,LTD.
壕門電子科技(廈門)有限公司HOPE TECHNOLOGIC(XIAMEN) CO.,LTD.

NS4 S型稱重傳感器

S TYPE LOAD CELL

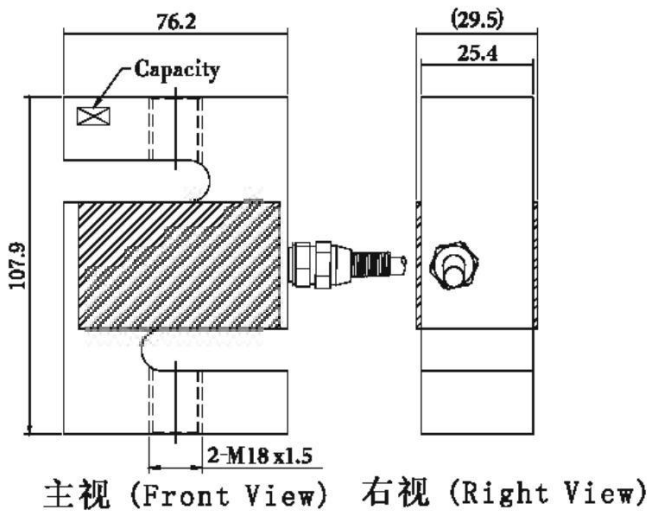

用途特点：料斗秤、吊鈎秤
Usage & Features: Hopper Scale、Crane Scale

技術參數 Specification

Rated Capacities	2, 2.5, 3, 5 (t)
Rated Output	2.0 mV/V±0.25%; 3.0 mV/V±0.25%
Zero Balance	±0.0200 mV/V
Non-linearity	0.03 %R.O.
Hysteresis	0.03 %R.O.
Repeatability	0.03 %R.O.
30mins Creep	0.03 %R.O.
30mins Return	0.03 %R.O.
Safe Overload	150 %R.O.
Ultimate Overload	200 %R.O.
Temperature Effect On Output	0.002 %R.O./°C
Temperature Effect On Zero	0.003 %R.O./°C
Input Impedance	390±15 Ω
Output Impedance	350±5 Ω
Insulation Impedance	≥5000 MΩ/(50VDC)
Recommended Excitation	5~12 VDC
Maximum Excitation	15 VDC
Operating Temperature Range	-20~60 °C
Construction	Steel Alloy
Protection Class	IP67 / IP68
Cable	φ5×6 m
Recommended Platform Size	
Mode of Connection	Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)